physicsUK
Smarter practice. Stronger understanding
WORKSHEETS
ATTEMPT CHECK CORRECT IMPROVE

Power laws and log–log graphs

35–40 minutes independent work + 15–20 minutes review | 40 marks

AQA A Level 7408 and OCR A A Level H556 | Mathematical skills

Skills and specification links

Use logarithms to find a power-law exponent and constant; interpret reference quantities and distinguish power laws from exponential change.
AQA maths MS 0.5, 2.2, 2.5, 3.1–3.4, 3.10–3.11; wire application: 3.5.1.3.
OCR A maths M0.5, M2.2, M2.5, M3.1–M3.4, M3.10–M3.11; wire application: 4.2.4(a)(i), (b).

A manufacturer tests fine-wire probes, an optical detector and a contact sensor. Use transformed graphs to test its models. Other than the wire equations, the physical models you need are supplied. Use a calculator and ruler. Show working; retain extra figures until the final answer.

1 Connect a power law to a straight line [4 marks]

For positive ratios $X = x/x_{ref}$ and $Y = y/y_{ref}$, a power law $Y = KX^n$ becomes $\log_{10} Y = n \log_{10} X + \log_{10} K$. Compare with $y = mx + c$: gradient = n; intercept $c = \log_{10} K$.
Using ln on both axes gives the same exponent, but the intercept is ln K. Recover K with the matching inverse: $K = 10^c$ for base 10, or $K = e^c$ for ln. Logarithms act on positive, dimensionless ratios.

(a) A calibration graph uses $\log_{10}$ on both axes and has intercept $c = 0.40$. Calculate K. [1 mark]

(b) A different calibration uses ln on both axes and has intercept $c = 0.40$. Calculate K. [1 mark]

(c) A detector has a straight log–log graph of response Y against separation X with gradient −1.5. State the power relationship and explain whether Y plotted directly against X would be a straight line. [2 marks]

Continue your physics journey
Videos, practice and support for your next step
www.physicsuk.co.uk

2 Transform the fine-wire measurements [7 marks]

The probes use uniform circular wires of the same alloy, all of length 0.50 m and held at the same temperature. Let $X = d/d_{ref}$ and $Y = R/R_{ref}$, where $d_{ref} = 0.40$ mm and $R_{ref} = 1.00\ \Omega$. Diameter d and resistance R are measured below.

d / mm	0.20	0.25	0.32	0.40	0.50	0.63
R / Ω	8.10	5.00	3.15	1.98	1.30	0.810
$\log_{10} X$	−0.301		−0.097	0.000		0.197
$\log_{10} Y$		0.699		0.297	0.114	

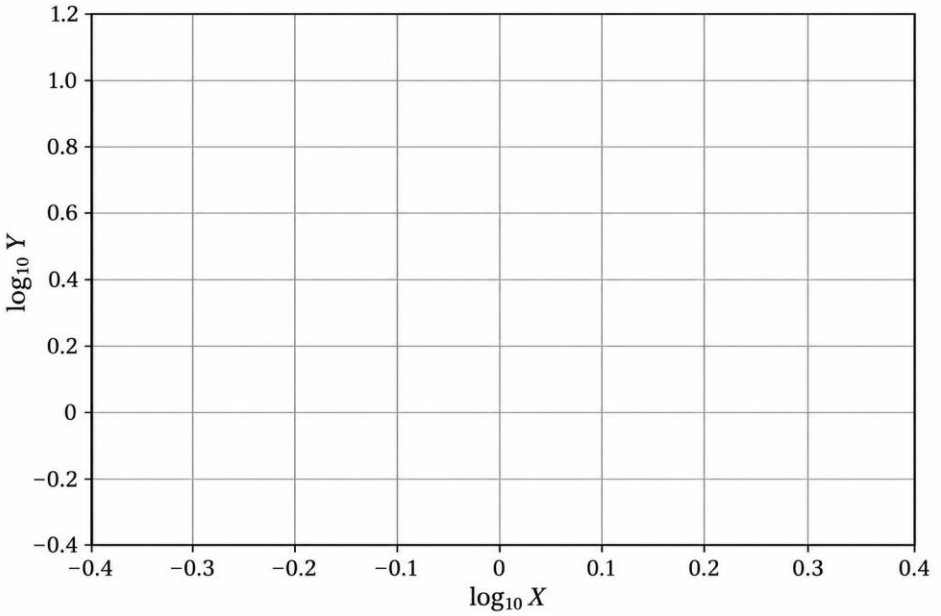


Figure 1 Plot $\log_{10} Y$ against $\log_{10} X$ on these linear scales.

(a) For the 0.25 mm wire, calculate X and Y. [1 mark]

(b) Complete the five blank log cells in the table to 3 decimal places. [2 marks]

(c) Plot all six points on Figure 1 and draw a straight line of best fit. [2 marks]

(d) For d = 0.20 mm, $\log_{10} X$ is negative. Explain why the diameter is still positive. [1 mark]

(e) State the diameter represented by $\log_{10} X = 0$. [1 mark]

Continue your physics journey
Videos, practice and support for your next step
www.physicsuk.co.uk

3 Recover the exponent and the physical constant [10 marks]

Use your line in Figure 1. The proposed model is $Y = KX^n$. For parts (b)–(e), use $n = -2.00$; retain your own intercept from the graph.

The dimensionless constant K depends on the chosen reference quantities. It is not automatically the SI constant k in $R = k\,d^{-2}$. In part (c), d must be expressed in metres.

(a) Draw a large gradient triangle on your line and use it to estimate n. [2 marks]

(b) Read the vertical intercept c and use it to find K. [2 marks]

(c) Starting with $R/R_{ref} = K(d/d_{ref})^{-2}$, find k in $R = k\,d^{-2}$. Give its SI unit. [2 marks]

(d) Use $R = \rho L/A_c$ and circular area $A_c = \pi d^2/4$ to explain why an exponent of −2 is expected. State what must remain constant. [2 marks]

(e) A new 0.48 mm wire must have resistance no greater than 1.50 Ω. Predict its resistance from your model and decide whether it meets this requirement. [2 marks]

Continue your physics journey
Videos, practice and support for your next step
www.physicsuk.co.uk

4 Test an inverse-square detector claim [7 marks]

An optical detector monitors a small source. Let $X = r/(1.00\ \text{m})$ and $Y = S/S_{ref}$, with reference response $S_{ref} = 1.00$ arbitrary unit. S is the background-corrected response. Its $\log_{10}$ Y-against-$\log_{10}$ X fit gives $n = -1.96 \pm 0.08$ and intercept $c = 1.30$. Measurements cover r = 0.50–2.00 m.

(a) Use the exponent's uncertainty range to assess $S \propto r^{-2}$ and $S \propto r^{-1}$. [2 marks]

(b) Use the fitted n and c to predict S at r = 1.20 m. [2 marks]

(c) The raw response is $S_{raw} = S + B$, where B is a positive constant background. Explain why B should be subtracted before taking logarithms, particularly at large r. [2 marks]

(d) Suggest another condition to control while changing r. Explain why it matters. [1 mark]

Continue your physics journey
Videos, practice and support for your next step
www.physicsuk.co.uk

5 Choose between a power law and an exponential [7 marks]

The manufacturer obtains two sets of readings. For set P, X is a source–detector separation ratio. For set E, X = ℓ/(1.00 mm), where ℓ is the thickness of an optical attenuator. Each Y is a positive response divided by its own reference response. Consider $Y = KX^n$ and $Y = A\,e^{-bX}$.

X	1.00	2.00	3.00	4.00
Y: set P	96.0	24.0	10.7	6.00
Y: set E	96.0	48.0	24.0	12.0

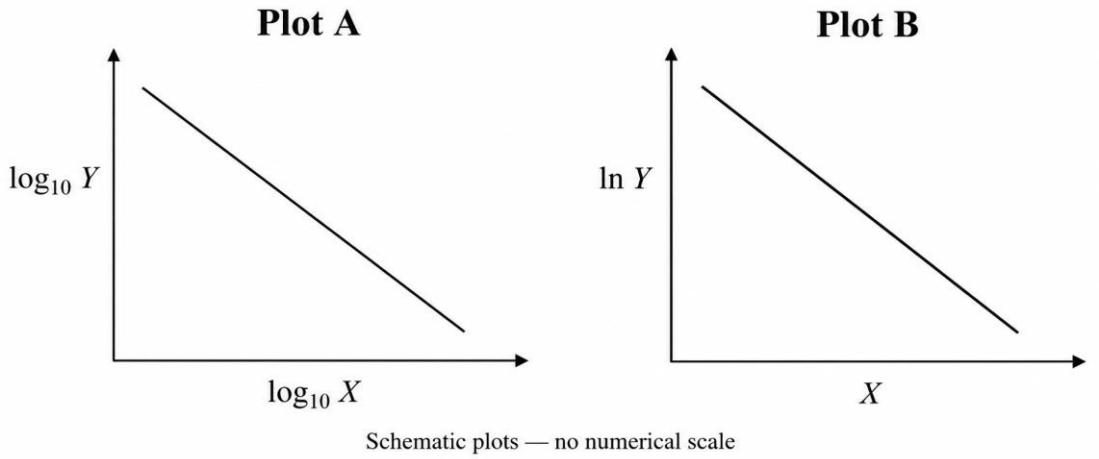


Figure 2 Two possible transformations; compare their horizontal axes.

(a) Use numerical ratios to identify which set is consistent with an inverse-square power law and which with exponential decrease. [2 marks]

(b) Match each set to the straight-line transformation in Figure 2. Justify each choice using the form of its equation. [2 marks]

(c) From set E, find the gradient of ln Y against X and hence b. Then find α in $Y = A\,e^{-\alpha\ell}$, in m^{-1}. [2 marks]

(d) Explain why a negative gradient alone cannot identify exponential decay. [1 mark]

Continue your physics journey
Videos, practice and support for your next step
www.physicsuk.co.uk

6 Transfer the method to a contact sensor [5 marks]

A contact sensor is calibrated with positive forces from 2.0 N to 16 N. Its tip deflects by δ. Define $X = F/(1.00\ \text{N})$ and $Y = \delta/(1.00\ \text{mm})$. A log–log fit gives $\log_{10} Y = 0.67 \log_{10} X - 0.20$. This supplied model is valid over the measured range.

(a) Write an equation for δ in terms of F, including the reference quantities. [2 marks]

(b) Predict δ at F = 8.0 N. Decide whether it meets a maximum allowed deflection of 3.0 mm. [2 marks]

(c) Explain why a prediction for F = 64 N should not be treated as validated by this calibration. [1 mark]

Final check Identify the axes, find the exponent, recover the constant with the correct inverse log, then restore reference quantities and units.

Continue your physics journey
Videos, practice and support for your next step
www.physicsuk.co.uk